# Vertical Body | Knob/ADA Handle on Left





#### **PRODUCT FEATURES**

- Wireless connectivity through BLE (Bluetooth Low Energy)
- IP55 rated, FCC, CE and IC certified
- Brushed nickel or black finish
- All metal housing
- Visual and audible indicators

- Advanced auto unlock
- ADA compliant
- Multiple options for knob style, cam type, and cylinder length
- Vertical orientation knob on the top or bottom
- Horizontal orientation knob on left or right

### **FUNCTIONALITY**

- Dual functionality shared or assigned use
- Manage with the DigiLink cloud based network application
- Operate by User pin or Mobile ID

#### INSTALLATION

- Designed for both new or retrofit installations
- Adaptable to multiple door thicknesses with varying cylinder lengths
- 90° or 180° knob rotation, clockwise or counter-clockwise to unlock

#### **POWER**

- Up to 5 years battery life with average use
- Powered by 4 premium AA batteries

#### **SUPPORT**

- On-site product updates
- Lifetime Support
- 2-year warranty






# Vertical Body | Knob/ADA Handle on Left


### **SIDE VIEW**

## 0.42in [10.70mm] 0.11in [2.70mm] 0.99in 1.16in [25.03mm] [29.55mm] 0.29in [7.25mm] 0.53in [13.40mm]


### **FRONT VIEW**

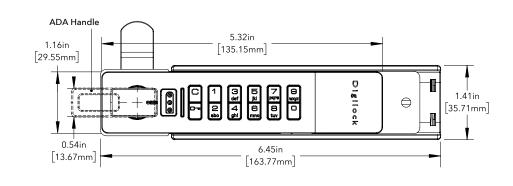


## CYLINDER LENGTH




### **TOP VIEW**

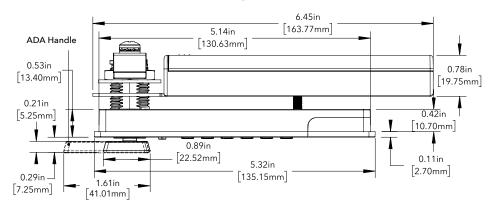


## **CAM OPTIONS**




	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
Α	0.74in (18.92mm)	0.98in (24.92mm)	1.30in (32.92mm)	1.61in (40.92mm)
В	1.23in (31.18mm)	1.46in (37.18mm)	1.78in (45.18mm)	2.09in (53.18mm)



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
Α	1.10in (28mm)	1.34in (34mm)	1.65in (42mm)	1.97in (50mm)



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
Α	1.23in (31.25mm)	1.47in (37.25mm)	1.78in (45.25mm)	2.10in (53.25mm)
В	1.47in (37.25mm)	1.70in (43.25mm)	2.02in (51.25mm)	2.33in (59.25mm)
С	1.97in (50.16mm)	2.20in (56.16mm)	2.53in (64.16mm)	2.84in (72.16mm)



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
Α	1.16in (29.5mm)	1.4in (35.5mm)	1.71in (43.5mm)	2.03in (51.5mm)